



Installation instructions

**Fairing and seat cowl modification
for
Honda NSF250R Moto3**

1. Cut the opening into the seat cowl at the marked place for additional muffler bracket (**Figure 1**).



Figure 1

2. Cut the lower part of the fairing as shown (**Figure 2, 3**).



Figure 2

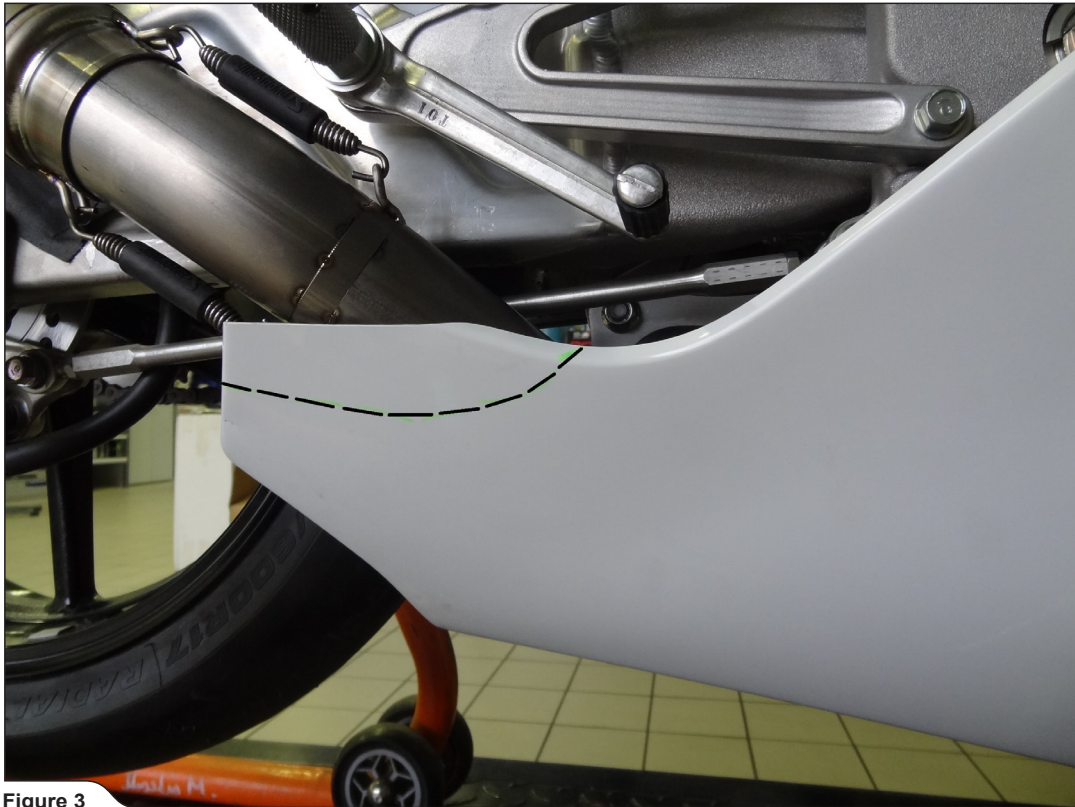


Figure 3

In case of any questions, please contact:

Miha.Jeraj@akrapovic.com

Robert.Hribar@akrapovic.com

