

SUZUKI GSX-R 600 (2008)

www.akrapovic.com

The Akrapovic Racing and Evolution open systems are designed for riders in road racing closed course competition and for those who attend trackdays and expect the maximum from their exhaust system. The Racing and Evolution open systems make the Suzuki substantially more responsive, and the HEXAGONAL muffler also provides a great visual modification and weight savings. Systems fit perfectly to stock mounting points and allow the use of passenger footpegs.

PERFORMANCE

Measurements of the Akrapovic EVOLUTION open system on the SUZUKI GSX-R 600 (without muffler insert):

Power & Torque: the Akrapovic exhaust system increase the responsiveness of the Suzuki and fill out the power and torque curves. The increase in torque starts already at around 3500 rpm, while the power curve increase starts around 5000 rpm and leads all the way to the top of the range. At 13670 rpm we measured a massive 116.3 HP.

CONFIGURATION

The Racing and Evolution systems differ only in the selection of tubing materials. The Racing is made of stainless steel, and the Evolution is made of titanium. Both systems have conical header tubes, cylindrical collectors, and a conical link pipes. All of the system components are attached with sleeve joints secured with silicon-shielded springs. The header tubes come with interference crossover tubes, and the systems also include a fitting for attaching a lambda sensor. The HEXAGONAL muffler is definitely the most eye-catching element of the system. It is made of a titanium inlet cap and perforated inner sleeve, while the outlet cap is made of carbon fiber. The outer sleeve is available in titanium or carbon fiber. The muffler is attached to the motorcycle using an Akrapovic carbon fiber clamp.

Technical specifications of Akrapovic exhaust systems and related products subject to change without notice.

	PERFORMANCE			
	stock	AKRAPOVIC	max. increased power	
max. rear wheel power HP / rpm (measured on Dynojet ATV)	112.3 / 13560	116.3 / 13670	4.9 / 14180	

	CONFIGURATION			
	header tubes	collector	link pipe	
material	STAINLESS STEEL / TITANIUM	STAINLESS STEEL / TITANIUM	STAINLESS STEEL / TITANIUM	
tube shape	CONICAL	CYLINDRICAL	CONICAL	

interference crossover tubes	YES (cyl. 2-3)		lambda sensor	YES(reduction nut for both sensor sizes!)		
header tube inner sleeves	S.S. CNC machined		header tube flanges	ALU CNC machined		
header tubes - collector connection	SLEEVE JOINT + SILICON SHIELDED SPRING		collector / header tube - link pipe connection	SLEEVE JOINT + SILICON SHIELDED SPRING		
link pipe - muffler connection	SLEEVE JOINT + SILICON SHIELDED SPRING		muffler inlet cap /outlet cap	Ti / Carb. fiber		
muffler metal interior	TITANIUM		muffler outer sleeve	Ti or carbon-fiber		
muffler clamp	CARBON-FIBER		CARBON-FIBER		muffler bracket	NO
muffler insert	EU	NOISE DAMPER	heat shield	-		
	US -		catalytic converter	-		

	ADDITIONAL DATA				
	stock	k AKRAPOVIC		difference	
weight comparison (kg)	10.34	RACING	EVOLUTION	stock - RACING	stock - EVOLUTION
		4.91	3.71	5.43	6.63


noise measurements (dB / rpm)	stock	AKRAPOVIC	
	94 / 6750	94 / 6750	
possibility of periodic service without removing A.E.S.	oil	oil filter	
	YES	YES	
legal for street use	NO		













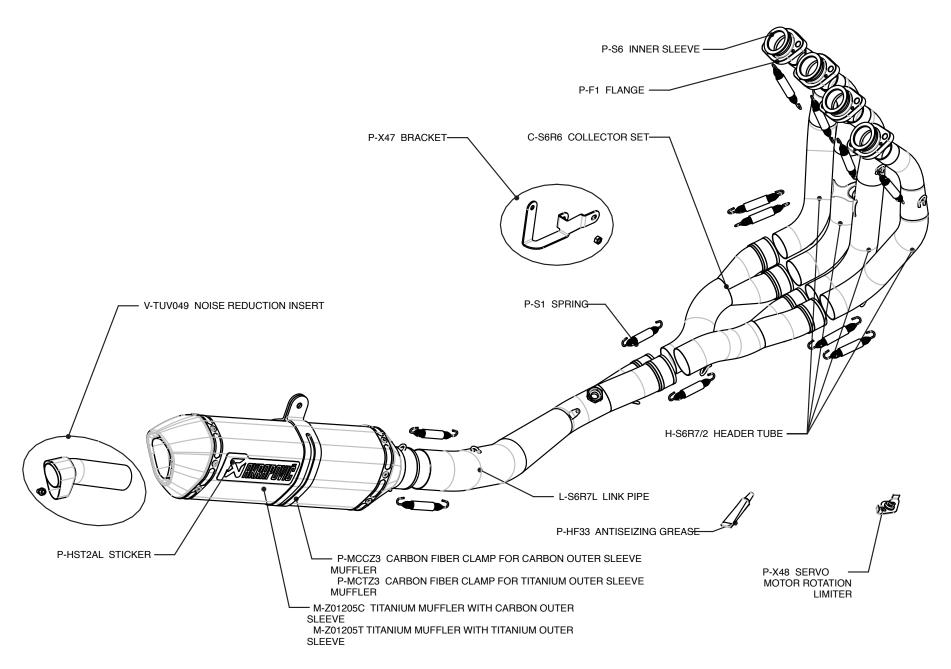

Product code: S-S6R7L-ZC, S-S6R7L-ZT racing S-S6RFT7TL-ZC, S-S6RFT7TL-ZT evolution

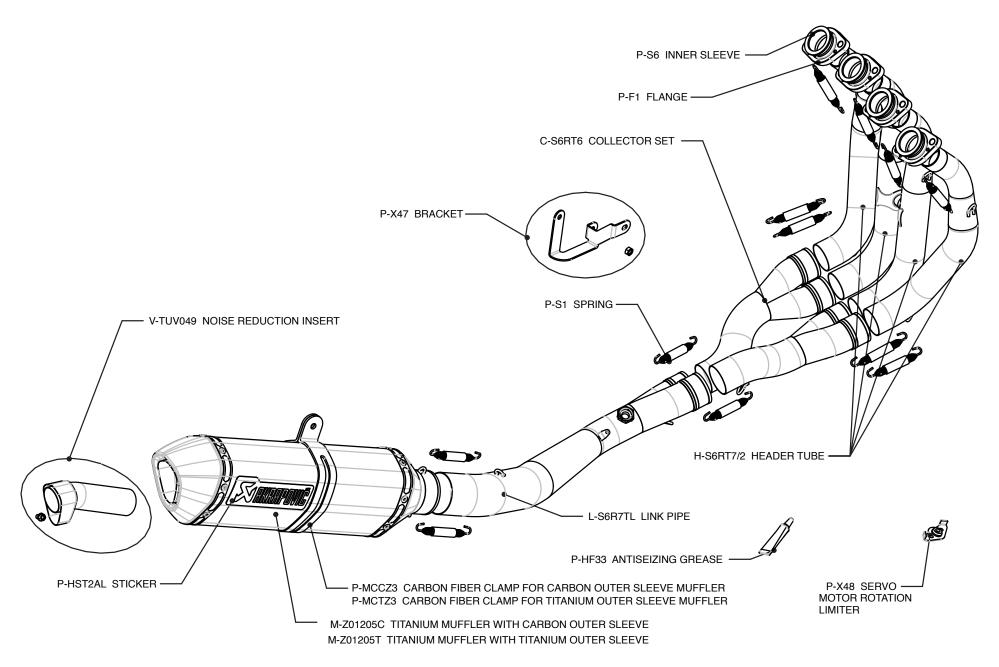

Product code: S-S6R7L-ZC, S-S6R7L-ZT racing

S-S6RFT7TL-ZC, S-S6RFT7TL-ZT evolution



